


# SPECIFICATIONS

Dimensions and minimum floor protector sizes as per standard AS/NZS 2918:2001

MODEL	TYPE	FASCIA	FLOOR PROTECTOR TYPE	FLOOR PROTECTOR THICKNESS	D	H	W	F	FF	FH	FW	HW	HD
<b>BANNOCKBURN I2000</b>	INSERT	STD	IFP-1	>33	510	587	630	100	410	702	850	900	362
<b>I3000 Z/C</b>	INBUILT	STD	ASH	N/A	607	652	770	197	410	700	900	900	362
<b>LE4000 PROVINCIAL</b>	INSERT	WIDE	IFP-3	>50	417	567	590	101	316	680	965	935	345
<b>LE4000 PROVINCIAL</b>	INSERT	SLIM	IFP-3	>50	417	567	590	101	316	700	845	935	345
<b>LE4000 PROVINCIAL Z/C</b>	INBUILT	STD	IFP-3	>50	525	696	715	210	315	750	965	935	345
<b>I7000 ZC RURAL</b>	DUCTED BUILT-IN*	STD	ASH	N/A	600	794	860	248	352	692	814	1000	300
			NON-COMBUSTIBLE FLOOR									1000	650

### INSTALL ELEVATION ABOVE GROUND FOR I7000 ZC RURAL

Ash Floor protector required for installation to 370mm and higher. For non-combustible floors, installation of 0-350mm.

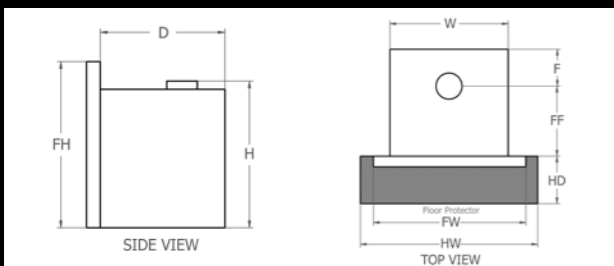

### FLOOR PROTECTORS:

**IFP-1** One layer of 6mm thick PROMATECT-H & 8mm thick tiles

**IFP-3** Two layers of 16mm thick MICORE 160 & one layer of 6mm fibre cement sheet & tiles

**ASH** Ash Floor Protector

NOTE: \*For other floor protector thicknesses the HD dimension changes. See installation instructions.

\* Lab tested peak heat output. Heat output and burn time will vary depending on fuel size, type and moisture content.

MODEL	Bannockburn	I3000	LE4000	I7000ZC
Peak output (kW)	14*	14*	16*	25*

## Installation

When installed in the correct manner as shown in the Masport Heating Installation Manual (supplied with the fire), your fire will provide a cleaner and more energy efficient warmth. Masport Heating recommends that all installation work be carried out by an installer who has completed the NZHHA certification programme. We recommend that your Masport Fire is installed with an approved Masport flue kit.

## Guaranteed For 10 Years

As a sign of our commitment to quality, all new Masport fire boxes are guaranteed for 10 years. We warranty our fire boxes to be free from defects in material or workmanship under normal use and service. The Warranty (on the cast iron or steel firebox excluding attachments) is for 10 years from the date of purchase.\*

\*1 Year warranty on all internal fire parts. 5 Year warranty on all multi-fuel fire boxes.

## Glossary

- NES** National Environmental Standards set by Ministry for the Environment.
- ECAN** Environment Canterbury emission standards.
- ORC Airshed 1** Otago Regional Council Airshed 1 emission standards.



Masport holds operational spares parts for up to 15 years from the last date of manufacture. This gives you peace of mind and knowledge that you can service your wood fire over its lifetime. This is the advantage of buying New Zealand made.



Glen Dimplex New Zealand Ltd  
PO Box 58473, Botany, Auckland  
[www.masportheating.co.nz](http://www.masportheating.co.nz)

Glen Dimplex New Zealand Ltd's policy is one of continuous development. We reserve the right to change size and specifications without notice. For confirmation of Masport Heating product details please refer to [www.masportheating.co.nz](http://www.masportheating.co.nz). Please refer to the installation and operation instructions before having your Masport Wood Fire installed. A full set of these instructions is supplied with each fire.

Masport\_Inbuilt\_06/2019



# INBUILT WOOD FIRES



This image is an example only of installation, please refer to your local dealer to view fire.



Made in New Zealand for New Zealand homes

[www.masportheating.co.nz](http://www.masportheating.co.nz)

## BANNOCKBURN I2000

A discreet fire to compliment your living space with comfort.

- NES, Ecan and ORC Airshed 1 clean air approved
- Efficiently heats areas 140m<sup>2</sup>
- Superior heat from a generously sized steel fire box
- Triple air combustion system
- Fitted with masonry fire bricks and steel fire baffle
- Suitable for masonry installation only
- **Optional water booster available, Clean air approved (NES and ECAN) 1.5kW max**

<b>FINISH:</b>	Metallic Black VHT
<b>LAB TESTED PEAK OUTPUT:</b>	14kW
<b>EMISSIONS:</b>	0.4g/kg
<b>EFFICIENCY:</b>	68%
<b>FASCIA DIMENSIONS (WxH):</b>	850 x 702mm



## LE 4000

Transform your existing masonry fireplace into a dramatic modern feature.

- NES, ECAN and ORC Airshed 1 clean air approved
- Efficiently heats areas 160m<sup>2</sup>
- Substantial heat from a fully finned 6mm steel firebox, triple air combustion system and heat exchanger technology
- Standard single-speed fan for optimal heat circulation
- Suitable for masonry and timber framed Zero Clearance (Z/C) recessed installations
- Available in wide, slim and Z/C Fascia

<b>FINISH (Fascia):</b>	Black VHT Paint
<b>LOUVRE/GRILL:</b>	Black VHT Paint
<b>LAB TESTED PEAK OUTPUT:</b>	16kW
<b>EMISSIONS:</b>	0.6g/kg
<b>EFFICIENCY:</b>	67%
<b>FASCIA DIMENSIONS (WxH):</b>	965 x 700mm (Wide) 845 x 680mm (Slim) 965 x 750mm (Z/C)



## I3000 ZERO CLEARANCE

Beauty and performance all in one great package.

- NES, ECAN and ORC Airshed1 clean air approved
- Efficiently heats areas 140m<sup>2</sup>
- Superior heat from a generously sized steel fire box
- Triple air combustion system
- Fitted with masonry fire bricks and steel fire baffle
- **Optional water booster available, Clean air approved (NES and ECAN) 1.5kW max**

<b>FINISH:</b>	Black VHT Paint
<b>LOUVRE/GRILL:</b>	Black VHT Paint
<b>LAB TESTED PEAK OUTPUT:</b>	14kW
<b>EMISSIONS:</b>	0.4g/kg
<b>EFFICIENCY:</b>	68%
<b>FASCIA DIMENSIONS (WxH):</b>	900 x 700mm (Z/C)



## I7000 ZC Rural

With an expansive viewing window, the I7000 adds great visual impact and plenty of heat for large, spacious areas.

- Efficiently heats areas up to 250m<sup>2</sup>
- Superior heat from a quality steel fire box
- Fitted with ceramic bricks and steel baffle for durability
- Must install ducted air vents
- Requires external ventilation for combustion
- For ZC applications only

NB: Please refer to installation manual prior to purchase to ensure product is suitable for your home.

<b>FINISH (Fascia):</b>	Metallic Black VHT
<b>LAB TESTED PEAK OUTPUT:</b>	25kW
<b>FASCIA DIMENSIONS (WxH):</b>	814 x 692mm

